


## Protectorshell Flange Adaptor - Male

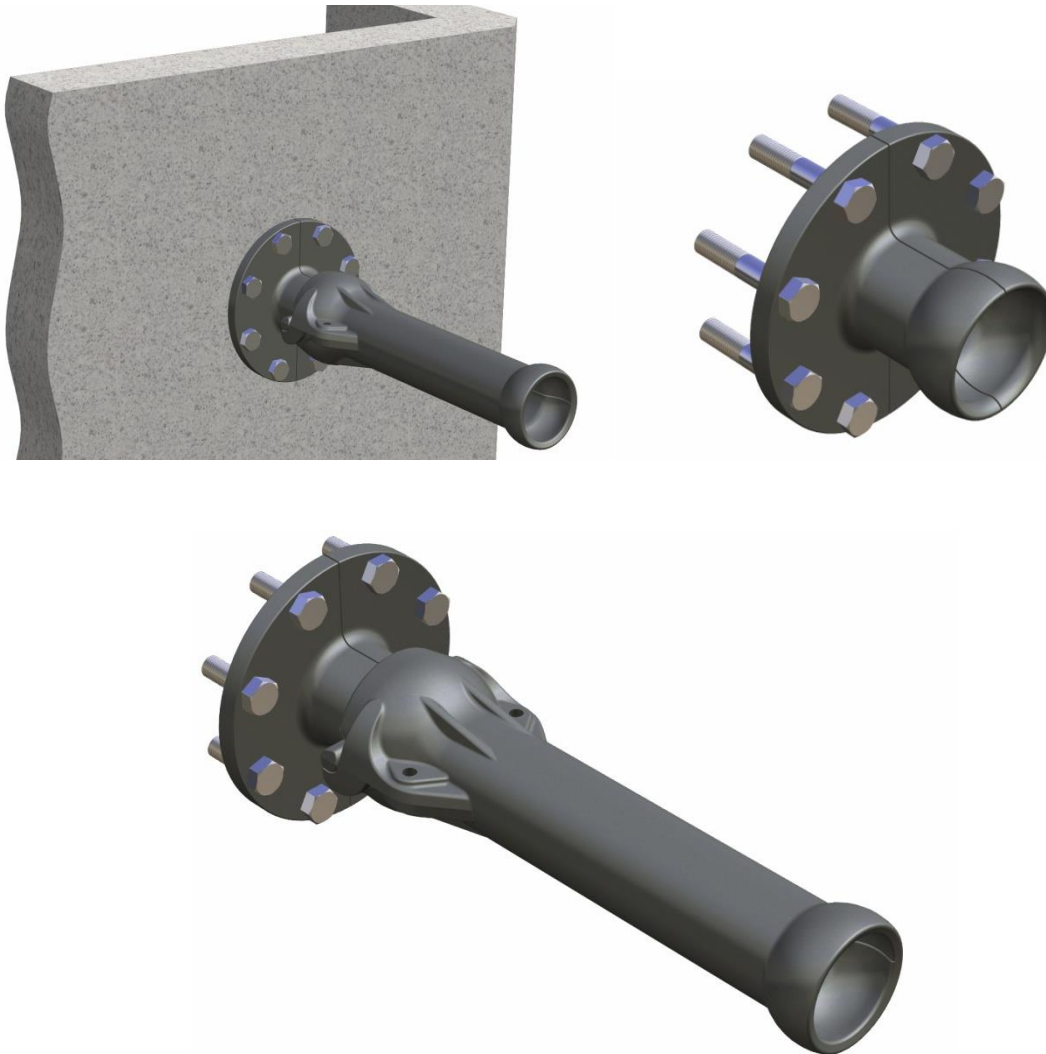

Allows a seamless starting interface for Protectorshell to flanged pipes and concrete structures

### Specifications

|                      |                            |
|----------------------|----------------------------|
| Design Life          | 25 years                   |
| Wall Thickness (min) | 9mm                        |
| Impact Resistance    | >7.5kJ                     |
| Material             | Ductile Iron 400/15        |
| Fasteners            | G316/A4-70 Stainless Steel |
| Colour               | Iron Grey                  |

#### Protectorshell SL

C Regata Cutty Sark No 21 4 IZ 15002 La Coruña, Spain  
T: +34 8 8124 1115 F: +34 8 8192 4978

[www.protectorshell.com](http://www.protectorshell.com)

#### MS Diversified Services Pty Limited

PO Box 150 Maroubra NSW 2035 Australia  
1135 Anzac Parade, Matraville, NSW 2036 Australia  
T: +61 2 9694 1004 F: +61 2 9314 3526